



ETON America, LLC




Service Bulletin

Bulletin No.: **SB-0038**

Date: 05/01/2006

C.D.I. Module Specifications Yukon II 150

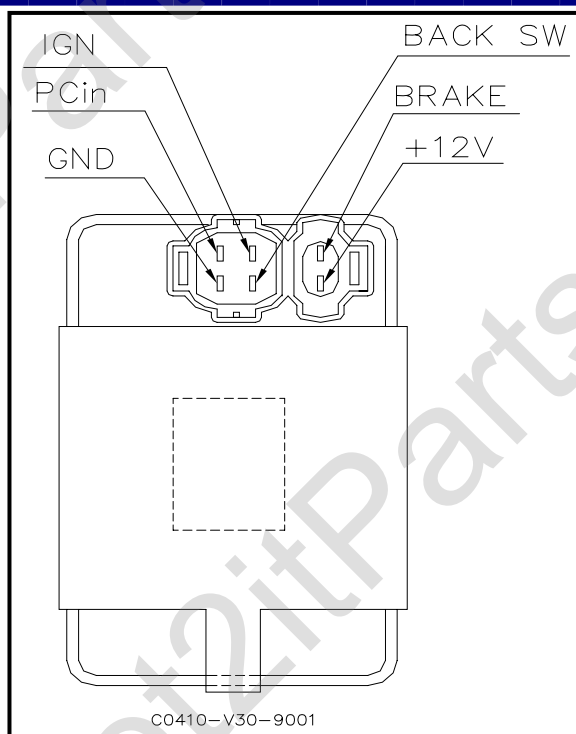

CXL-150 -- C0410-V30-9001

Electric resistance(Ω) specification

| | +12V | BRAKE | BACK SW | IGN | Pcin | GND |
|---------|-------------|---------------|---------------|----------|-------------|--------|
| +12V | | 26-30K | 20-24K | ∞ | 15-20K | 5-6K |
| BRAKE | 30-50K | | 30-50K | ∞ | 30-50K | 20-30K |
| BACK SW | 30-40K | 30-50K | | ∞ | 30-50K | 18-22K |
| IGN | 5-7K | 20-50K | 30-50K | | 9-10K | 1-3K |
| Pcin | 20-30K | 450-550K | 40-50K | ∞ | | 15-20K |
| GND | 1-3K | 30-40K | 20-30K | ∞ | 4-6K | |

Specifications highlighted in yellow are the suggested critical testing points. Test points should be tested first.

We suggest using analogy type multi-meter to test the electric resistance. We have found using digital type meter produces to many inaccurate readings.