



ETON America, LLC




Service Bulletin

Bulletin No: 0031


Date: 07/20/04

Safety Tether Switch Installation

Install the tether switch on the LH side of the handlebars and shown in the picture. Tighten to the handlebars with the 4 bolts supplied with the switch. Start the bike and lock the parking brake. Pull the rubber cap from the switch and the bike should stop. If it doesn't check the connections for your bike as shown in the pictures.

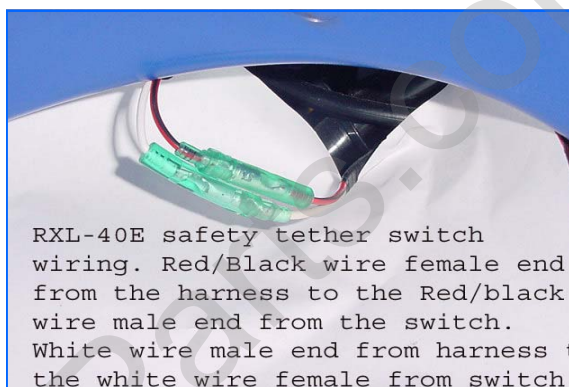

RXL-90R safety switch wiring. White/Black wire female from harness to Red/Black wire male from the switch. Brown/Yellow wire male from the harness to the White wire female from the switch.

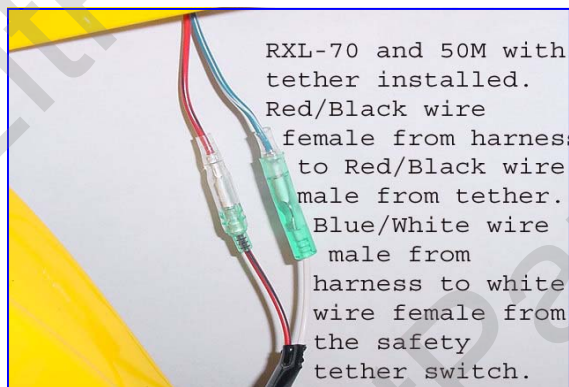

Switch color codes	40E	50M	70	90R
Red/Black male	Red/Black Female	Red/ Black Female	Red/ Black Female	White/ Black Female
White wire female	White wire Male	Blue/ White Male	Blue/ White Male	Brown/Yel Male